


GOING FUTURE TODAY.

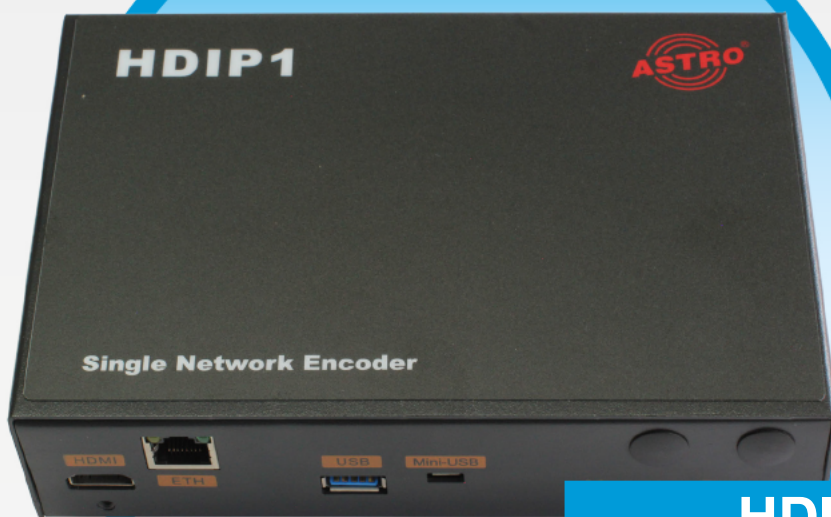

Network Encoder

**HDIP 1**

- for modulation of local HDMI signal sources (camera, settop box, PC) into an IP transportstream
- multiple streams out with different protocol / resolution / bitrate
- resolution downscale conversion
- supports HLS protocol (simultaneously running at different resolution and bit rate setting)
- USB port for TS recording and playing
- HDMI input
- IP output over UDP (unicast / multicast), RTMP, RTP / RTSP, HTTP and HLS



Type	HDIP 1	
Order number	380 275	
EAN-Code	4026187197483	
Encoding		
Encoding of video files		yes, TS via USB
Video encoding		MPEG 4 AVC / H.264
Interface		HDMI
Resolutions		1920x1080 60P, 1920x1080 50P; 1920x1080 60i, 1920x1080 50i; 1280x720 60p, 1280x720 50P, 720x480 60i, 720x576 50i
Video bit rates	[Mbps]	1 ... 15
Audio encoding		MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC
Sample rate	[kHz]	48; 44,1 (RTMP)
Bit rate	[kpbs]	48, 64, 96, 128
Stream out		
		UDP (Unicast/multicast), RTMP, RTP/ RTSP, HLS, HTTP (RJ45, 100/1000M self adaption)
System		
Remote control		Webserver NMS
Language		English
Upgrade		USB / NFS
Common data		
Dimensions	[mm]	183 x 110 x 45
Power supply	[VDC]	12
Weight	[kg]	< 1
Ambient temperature	[°C]	0 ...+45